




MOML-04



Quick Installation Guide

1. Supplied Unit

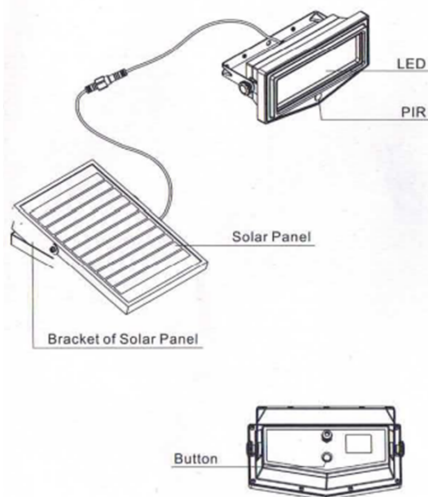


2. Installation

Step 1: Use supplied pillar hinge and screws to mount unit to the wall. For optimal light output, install unit at 3m high.

Step 2: Ensure the solar panel is facing north and install away from shaded areas to allow maximum output.

Step 3: Connect solar panel to light via plug.

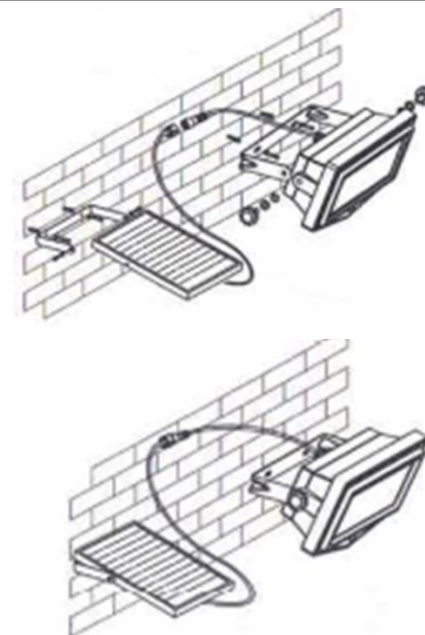


3. Working Mode

Locate power (red) button at the back of the unit. Press and hold button for 3 seconds to turn on and off unit.


Short press button to toggle between the two modes. When unit is turned off, it will revert to the last chosen mode when turned back on.

Please allow the unit to charge for 5H after initial set up to assist in longevity of the battery



Modes

- M1- DIM Light 5% + PIR Full Brightness 30S
- M2- DIM Light 15% + PIR Full Brightness 30S



4. Additional Information

1. Press and hold button to turn on the unit before installation
2. Please allow 5 hours charging time in bright sunlight before first time use
3. Without charging for one week, the battery may be out of power and will need charging under bright sunlight
4. If the sun power is less than the standard condition:
 - Illumination Intensity: 1000W/m²
 - Temperature: 25°CIt will need longer charging time and/or the lighting time will be less than the data listed in the specifications.



Contact us

(08) 6141 3204
info@omasolar.com.au
omasolar.com.au